

Mask Set Errata 1

68HC908GP32 8-Bit Microcontroller Unit

INTRODUCTION

This mask set errata provides information pertaining to the power-up and power-down requirements applicable to these 68HC908GP32 MCU mask set devices:

- 3J20X
- 0K08S

MCU DEVICE MASK SET IDENTIFICATION

The mask set is identified by a 5-character code consisting of a version number, a letter, two numerical digits, and a letter, for example 0XJ66D. Slight variations to the mask set identification code may result in an altered version number, for example 1XJ66D.

MCU DEVICE DATE CODES

Device markings indicate the week of manufacture and the mask set used. The date is coded as four numerical digits where the first two digits indicate the year and the last two digits indicate the work week. For instance, the date code "9115" indicates the 15th week of the year 1991.


MCU DEVICE PART NUMBER PREFIXES

Some MCU samples and devices are marked with an SC or XC prefix. An SC prefix denotes special/custom device. An XC prefix denotes that the device is tested but is not fully characterized or qualified over the full range of normal manufacturing process variations. After full characterization and qualification, devices will be marked with the MC prefix.

When contacting a Motorola representative for assistance, please have the MCU device mask set and date code information available.


Power-Up and Power-Down Requirements

The precautions described below must be followed for 68HC908GP32 power-up and power-down, otherwise unpredictable device behavior may occur. In severe cases, the 68HC908GP32 may experience FLASH memory erasure.

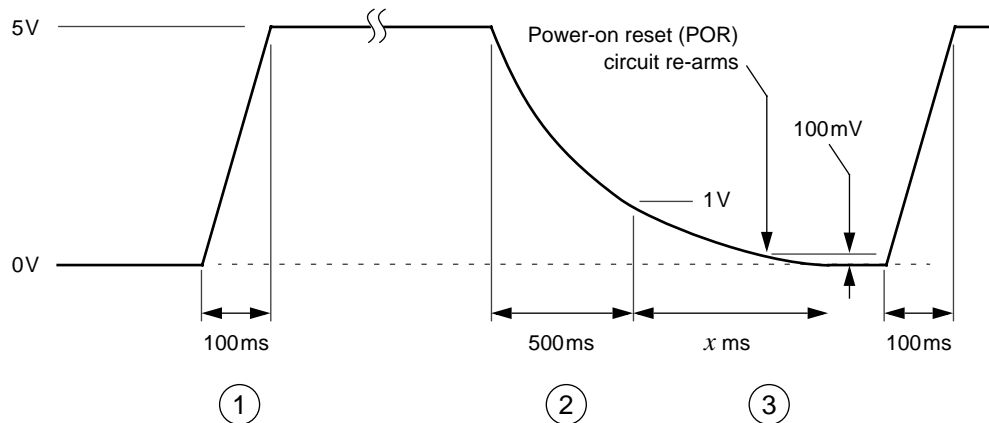

1. At power-up, supply voltage rise-time should be as short as possible; less than 143ms for 5V operation; best to aim for less than 100ms.
2. At power-down, supply voltage should fall below 1V in less than 500ms.
3. Before power-up again, supply voltage must fall below 100mV for the 68HC908GP32 power-on reset circuit to rearm.

In addition, keep the external reset pin (\overline{RST}) pulled low at least until supply voltage has reached its operating level.

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Additional mask set erratas can be found on the World Wide Web at <http://www.motorola.com/mcu/documentation>